
Lifting Solutions Group
Axel Johnson International

Rescue Lifting Device RUP 502-U

Product information

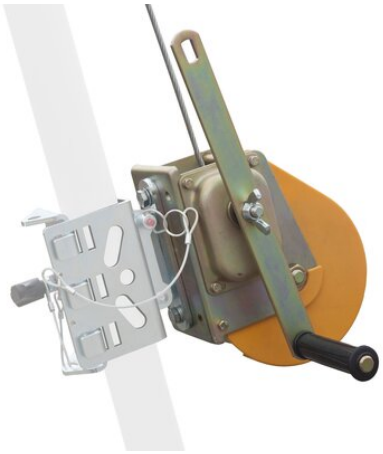

Rescue lifting and lowering winch. The winch is equipped with an ø 6,3 mm steel galvanized cable and automatic emergency brake. Kit includes SDW spring absorber.

Features

- Gear ratio: 5:1
- Adjustable crank length (150/300 mm)
- Force required to pull with crank length 150 mm: 5,6 kg
- Force required to pull with crank length 300 mm: 11,6 kg.

Safety factor: 10:1

... *Read more*

Material: Steel, plastic
Marking: According to standard
Finish: Galvanized
Standard: EN 1496-B
Note: The lifting/lowering distance must not exceed 2 meters.

Certex Lietuva UAB
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Rescue Lifting Device RUP 502-U

Technical data

Part code	WLL ton	Min. breaking force kN	Length m	Weight kg
825102500470	0.14	20	25	13

Certex Lietuva UAB
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved