
CERTEX | Lifting Solutions Group
Axel Johnson International

# Steel Wire Rope 6x7-WSC

## Product information



Stay rope

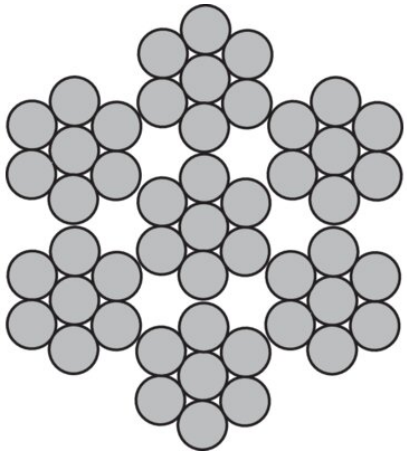

Agriculture and livestock



General use



**Rope construction:** 6x7-WSC (7x7)
**Marking:** According to standard
**Temperature range:** -40°C up to +200°C, for operating temperatures between 100 °C and 200 °C reduce MBF by minus 10 %
**Standard:** EN 12385-4

**Fill factor:** 0,55

**Certex Lietuva UAB**
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

# Steel Wire Rope 6x7-WSC

## Technical data

| Part code | Rope diameter mm | Tensile strength N/mm² | Finish | Rope lay | Min. breaking force kN | Steel area mm² | Lubrication | Weight kg/100m |
|---|---|---|---|---|---|---|---|---|
| 101100204250160 | 2 | 1,770 | Galvanized | sZ | 2.75 | 1.73 | Dry | 1.54 |
| 101100304250160 | 3 | 1,770 | Galvanized | sZ | 6.18 | 3.89 | Dry | 3.46 |
| 101100404250160 | 4 | 1,770 | Galvanized | sZ | 11 | 6.91 | Dry | 6.14 |
| 101100504250160 | 5 | 1,770 | Galvanized | sZ | 17.2 | 10.8 | Dry | 9.6 |
| 101100604250160 | 6 | 1,770 | Galvanized | sZ | 24.7 | 15.6 | Dry | 13.8 |

**Certex Lietuva UAB**
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved