


Coil Hook Type CKBG

Product information

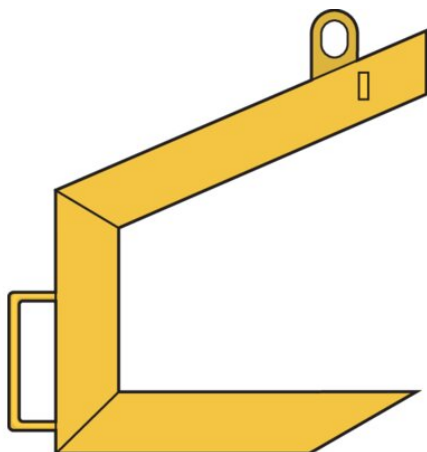

CERTEX

Gas-spring balanced

General: For medium-sized loads and large coil widths. This type of hook is mostly used for aluminium and paper-roll coils. For further information, see the introductory text above in the section on C-hooks.

Design: Hollow-beam with built-in gas spring for lightweight construction. The lifting eye on the loaded gas spring balances the coil hook, which means that the fork remains horizontal, regardless of whether the hook is empty — or carrying at least 15% of the maximum load.

Proof: 1,5 x WLL.

[... Read more](#)

Material: Hollow-beam of high-strength structural steel.


Marking: Type, working load limit, maximum coil width and CE marking.

Finish: Yellow painted.

Safety factor: 1,5 x WLL.

Coil Hook Type CKBG

Blueprint



Technical data

WLL ton	Max coil width mm	B mm	C mm	E mm	G, mm	H, mm	L mm	S mm	Weight kg
5	1,360	80	110	1,250	100	300	635	230	170
5	1,200	80	110	900	150	400	620	125	175