


Chain Sling Powertex 2-leg with Safety Hooks, Grade 10

Product information

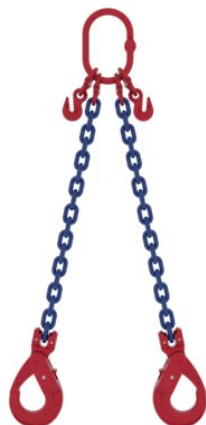

The Chain Sling Powertex 2-leg with safety hooks is a two-leg lifting assembly for general industrial use. It is designed for balanced lifting where load distribution across two lifting points, secure attachment, and predictable performance are required.

The standard assembly includes a master link, Grade 10 chains, shortening grab hooks, safety hooks, and a marking plate with WLL information. This provides a complete and ready-to-use configuration for everyday lifting tasks.

The sling can also be supplied in alternative configurations with different hooks, master links, or shortening options on request.

When to choose this product

Best for:

- Balanced lifting using two lifting points
- Applications where secure hook closure is preferred during lifting

Product benefits

- Safety hook provides a more secure connection, helping reduce the chance of unintentional hook release during lifting
- Shortening grab hook allows chain length adjustment, supporting accurate load positioning without extra components
- Grade 10 chain provides higher capacity compared to Grade 8, enabling compact setups without increasing chain diameter
- Components are crack detection tested, and samples from each batch are proof load tested, supporting consistent quality control
- Fatigue rated to 20,000 cycles at 1.5x WLL, helping maintain predictable behaviour in repetitive lifting applications
- Marking plate shows WLL and angle capacities, simplifying load planning ... [Read more](#)

Material: Alloy steel

Marking: According to standard, CE-marked

Temperature range: -40°C up to +200°C without reduction in WLL

Finish: Red powder paint

Standard: EN 818-4

(+25 % WLL)

Safety factor: 4:1

Grade: 10

Chain Sling Powertex 2-leg with Safety Hooks, Grade 10

Technical data

Part code	WLL ton
240800600200220	2
240800600400220	2
240800800200220	3.55
240800800400220	3.55
240801000200220	5.6
240801000400220	5.6
240801300400220	9.5
240801300600220	9.5
240801600400220	14
240801600600220	14
240802000400220	22.4
240802000600220	22.4
240802200500220	26.5
240802600500220	37.5
240803200500220	56