
Lifting Solutions Group
Axel Johnson International

# Roundsling Assembly RR-476

## Product information

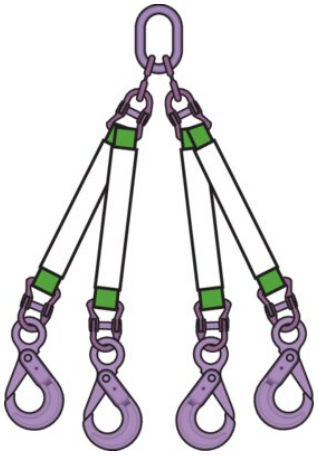

**Design:** Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

**Stretch with working load:** 2-3%.

**Length tolerance:** Nominal length ±2%.

**Safety factor:** Forge 4:1 and round sling 7:1.

... *Read more*

**Material:** Polyester. Resistant to most acids but not strong alkalizes.
**Marking:** According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.
**Temperature range:** app. -40° - +100°C.
**Standard:** EN 1492-2

**Grade:** 10

**Certex Lietuva UAB**
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

# Roundsling Assembly RR-476

## Technical data

| Part code | WLL ton | Colour |
|---|---|---|
| 12.23RR47601XX | 2.1 | Violet |
| 12.23RR47602XX | 4.2 | Green |
| 12.23RR47603XX | 6.3 | Yellow |
| 12.23RR47604XX | 8.4 | Grey |
| 12.23RR47605XX | 10.5 | Red |
| 12.23RR47606XX | 12.6 | Brown |
| 12.23RR47608XX | 16.8 | Blue |
| 12.23RR47610XX | 21 | Orange |

**Certex Lietuva UAB**
info@certex.lt
+370 5 2300020

© November 2026 - All Rights Reserved